



www.ourdesignarc.com

Cooler and Freezer Products





 OUR DESIGN



CONTENT



**UPRIGHT
BOTTLE COOLERS**

4-23



**WINE
COOLERS**

24-25



**CHEST
BOTTLE COOLERS**

26-31



**SHOWCASE
CONSERVATORS**

32-43



**ICE CREAM
SHOWCASES**

44-45



**COMMERCIAL
CONSERVATORS**

46-51



**CHEST
FREEZERS**

52-57



**UPRIGHT
FREEZERS**

58-61



SLIM
Bottle Coolers



Bottle Coolers / Slim



OUR 180 DC 1 YF



OUR 265 DC 1 YF



OUR 265 DC 1 CF



OUR 265 DC 1 CFP

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	189 / 179	268 / 253	268 / 253	268 / 253
Dimensions (External) (W x D x H) (mm)	470 x 545 x 1265	450 x 595 x 1825	450 x 595 x 2007	450 x 595 x 2077
Dimensions (Internal) (W x D x H) (mm)	395 x 435 x 1120	360 x 490 x 1396	360 x 490 x 1396	360 x 490 x 1396
Dimensions (External with Package) (W x D x H) (mm)	500 x 577 x 1365	485 x 640 x 1935	485 x 640 x 2115	485 x 640 x 2185
Can Loading Capacity (Std / Max) (330 ml) / Facing	192 / 5	255 / 5	255 / 5	255 / 5
Lighting	LED on Top	LED on Top	LED on Top	LED on Top
Shelf Quantity	3	4	4	4
Cooler Refrigerant Type	R600a	R600a	R600a	R600a
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	44	41	41	41
Loading (40' HC Container) (units)	96/192	84	84	84
Loading (Truck, 13,6 m) (units)	108	105	105	105
Weight Net / Gross (kg)	42 / 45	71 / 79	74 / 82	77 / 85

HIGHLIGHTS (May differ by models)

• 2200 mm / 3x1 mm ² Power Cable Length	• Gray Aluminum Flat Door Frame (For P Model)	• Internal Canopy (For CF Model)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Shelf Type PVC Coated Wire Shelf
• Light Switch	• Metal Kick Plate (Black Color)	• Adjustable Front Foot (pcs) and wheels (Roller)
• Fan Switch	• Built-in Handle	• White Metal Inner Body - For 245 Model
• Tempered Double Glass	• White Metal Inner Body	• Packing Type Carton Packing + Wooden Pallet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)

OPTIONS (May differ according to models)

• Body in Different Colors	• Aluminium Gray Frame Flat Door (Spring Hinged)	• Door Sticker Full
• Internal Canopy	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Price Holders and Strips
• Frameless Canopy (Metal)	• Plastic Door Frame in Different Colors	• Digital and Analog Thermometer
• Night Cover	• Self Closing Door	• Digital Thermostat
• Energy Lamp (Green)	• American / Master Door Handle Set (Only with aluminum profile)	• R134a Refrigerant Gas
• Residual Current Relay Plug Group	• On Door 3D LED Lighting	• 115 V / 60 Hz - 220 V / 60 Hz
• Single Low-e Glass	• Sticker Application Left-Right Sides	



STEPLESS

Bottle Coolers



Bottle Coolers / Stepless



OUR 365 DC 1 VF



OUR 365 DC 1 CF

STANDARD TECHNICAL SPECIFICATIONS		
Volume, Gross / Net (l)	376 / 356	376 / 356
Dimensions (External) (W x D x H) (mm)	595 x 595 x 1825	595 x 595 x 2007
Dimensions (Internal) (W x D x H) (mm)	505 x 490 x 1396	505 x 490 x 1396
Dimensions (External with Package) (W x D x H) (mm)	615 x 640 x 1935	615 x 640 x 2115
Can Loading Capacity (Std / Max) (330 ml) / Facing	357 / 7	357 / 7
Lighting	LED on Top	LED on Top
Shelf Quantity	4	4
Cooler Refrigerant Type	R600a	R600a
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	27	27
Loading (40' HC Container) (units)	57	57
Loading (Truck, 13,6 m) (units)	84	84
Weight Net / Gross (kg)	84 / 92	88 / 97


HIGHLIGHTS (May differ by models)		
• 2200 mm / 3x1 mm² Power Cable Length	• Metal Kick Plate (Black Color)	• Internal Canopy (For CF Model)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Shelf Type PVC Coated Wire Shelf
• Light Switch	• Reversible Door (Depends on Models)	• Adjustable Front Foot (pcs)
• Fan Switch	• Built-in Handle	• Wheels (Roller)
• Tenpered Double Glass	• White Metal Inner Body	• Packing Type Carton Packing + Wooden Pallet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)

OPTIONS (May differ according to models)		
• Body in Different Colors	• Single Low-e Glass	• Sticker Application Left-Right Sides
• Internal Canopy	• Aluminium Gray Door Frame Flat Door (Spring Hinged)	• Door Sticker Full
• Frameless Canopy (Metal)	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Price Holders and Strips
• Residual Current Relay Plug Group	• Plastic Door Frame in Different Colors	• Digital and Analog Thermometer
• Night Cover	• Self Closing Door	• Digital Thermostat
• Door Lock	• American / Master Door Handle Set (Only with aluminum profile)	• 115 V / 60 Hz - 220 V / 60 Hz
• Energy Lamp (Green)	• On Door 3D LED Lighting	



TOWER

Bottle Coolers

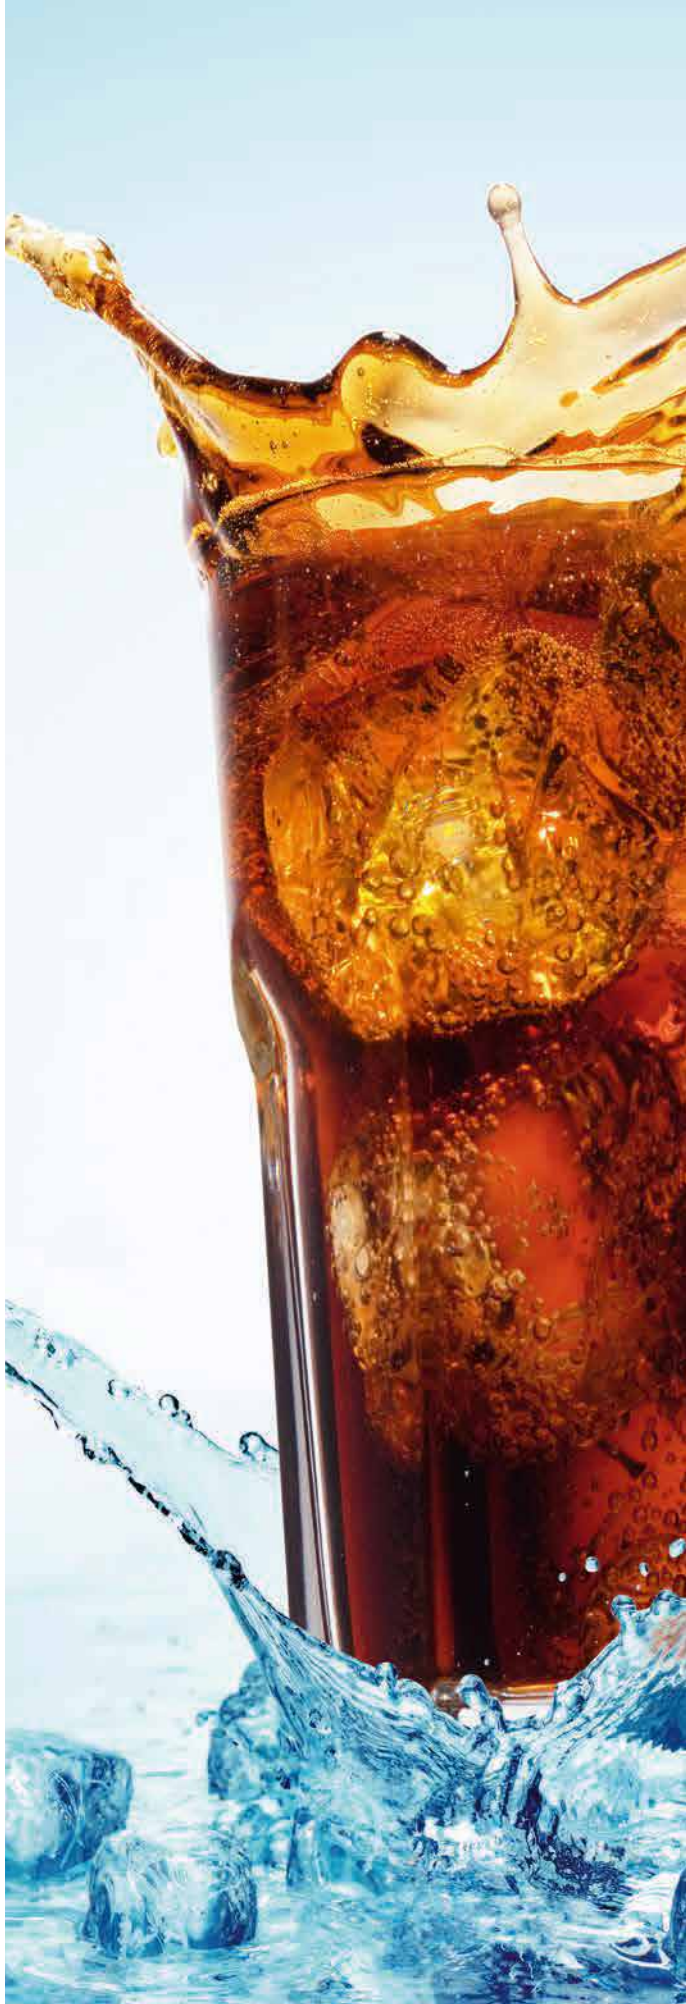

Bottle Coolers /Tower



OUR 385 DC 1 YF OUR 385 DC 1 CF OUR 385 DC 1 YF P OUR 385 DC 1 PF OUR 385 DC 2 CF OUR 385 DC 2 PF ZÜ

STANDARD TECHNICAL SPECIFICATIONS						
Volume, Gross / Net (l)	373 / 358	373 / 358	373 / 358	373 / 358	369 / 355	369 / 355
Dimensions (External) (W x D x H) (mm)	595 x 605 x 1810	595 x 605 x 1994	595 x 605 x 1845	595 x 605 x 1832	595 x 605 x 1994	595 x 605 x 1832
Dimensions (Internal) (W x D x H) (mm)	505 x 425 x 1615	505 x 425 x 1615	505 x 425 x 1615	505 x 425 x 1615	505 x 425 x 1615	505 x 425 x 1615
Dimensions (External with Package) (W x D x H) (mm)	615 x 640 x 1925	615 x 640 x 2070	615 x 640 x 1970	615 x 640 x 1985	615 x 640 x 2070	615 x 640 x 1985
Can Loading Capacity (Std / Max) (330 ml) / Facing	406 - 476 / 7	406 - 476 / 7	406 - 476 / 7	406 - 476 / 7	406 - 476 / 7	406 - 476 / 7
Lighting	LED on Top	LED on Top	LED on Top	LED on Top	LED on Top	LED on Top
Shelf Quantity	5	5	5	5	5	5
Cooler Refrigerant Type	R600a	R600a	R600a	R600a	R600a	R600a
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	27	27	27	27	27	27
Loading (40' HC Container) (units)	57	57	57	57	57	57
Loading (Truck, 13,6 m) (units)	84	84	84	84	84	84
Weight Net / Gross (kg)	71 / 80	80 / 88	82 / 89	75 / 81	80 / 88	75 / 81

HIGHLIGHTS (May differ by models)		
• 2200 mm / 3x1 mm² Power Cable Length	• Gray Aluminum Flat Door Frame (For P Model)	• Internal Canopy (For CF Model)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Shelf Type PVC Coated Wire Shelf
• Light Switch	• Reversible Door (Depends on Models)	• Wheels (Roller)
• Fan Switch	• Built-in Handle	• Packing Type Carton Packing + Wooden Pallet
• Tempered Double Glass	• Inner Body Type White HIPS Plastic	• Standard Certificates (CE, CB, EMC)
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,45 mm	

OPTIONS (May differ according to models)		
• Plastic Bottom Shutter (Black)	• Single Low-e Glass	• On Door 3D LED Lighting
• Body in Different Colors	• Aluminium Gray Door Frame Flat Door (Spring Hinged)	• Sticker Application Left-Right Sides
• Internal Canopy	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Door Sticker Full
• Curved Canopy and Kickplate	• Plastic Door Frame in Different Colors	• Price Holders and Strips
• Night Cover	• Self Closing Door	• Digital and Analog Thermometer
• Door Lock	• American / Master Door Handle Set (Only with aluminum profile)	• Digital Thermostat
• Energy Lamp (Green)	• Inner Body Power LED Lighting	• 115 V / 60 Hz - 220 V / 60 Hz



WIDE



Bottle Coolers /Wide



OUR 500 DC 1 CF



OUR 500 DC 1 YF



OUR 510 DC 1 CF



OUR 510 DC 1 YF

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	567 / 516	588 / 531	567 / 516	588 / 531
Dimensions (External) (W x D x H) (mm)	640 x 740 x 2145	640 x 740 x 2160	640 x 740 x 2145	640 x 740 x 2160
Dimensions (Internal) (W x D x H) (mm)	550 x 590 x 1480	550 x 590 x 1685	550 x 590 x 1480	550 x 590 x 1685
Dimensions (External with Package) (W x D x H) (mm)	660 x 760 x 2250	660 x 760 x 2250	660 x 760 x 2250	660 x 760 x 2250
Can Loading Capacity (Std / Max) (330 ml) / Facing	616 / 8	648 / 8	616 / 8	648 / 8
Lighting	LED on Top	LED on Top	LED on Top	LED on Top
Shelf Quantity	5	5	5	5
Cooler Refrigerant Type	R600a	R600a	R290	R290
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	24	24	24	24
Loading (40' HC Container) (units)	54	54	54	54
Loading (Truck, 13,6 m) (units)	60	60	60	60
Weight Net / Gross (kg)	105 / 115	105 / 115	105 / 115	105 / 115

HIGHLIGHTS (May differ by models)

• 2200 mm / 3x1 mm² Power Cable Length	• Plastic Kick Plate (Black Color)	• Internal Canopy (For CF Model)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Packing Type Cartoon Packing + Strafor
• Light Switch	• Reversible Door (Depends on Models)	• Adjustable Front Foot (pcs)
• Fan Switch	• Built-in Handle	• Wheels (Roller)
• Tempered Double Glass	• White Metal inner Body	• Packing Type Carton Packing + Wooden Pallet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)

OPTIONS (May differ according to models)

• Body in Different Colors	• Aluminium Door Frame Flat Door (Spring Hinged)	• Sticker Application Left-Right Sides
• Internal Canopy	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Door Sticker Full
• Frameless Canopy (Metal)	• Plastic Door Frame in Different Colors	• Price Holders and Strips
• Night Cover	• Self Closing Door	• Digital and Analog Thermometer
• Door Lock	• American / Master Door Handle Set (Only with aluminum profile)	• Digital Thermostat
• Energy Lamp (Green)	• Inner Body Power LED Lighting	• R134a Refrigerant Gas
• Single Low-e Glass	• On Door 3D LED Lighting	• 115 V / 60 Hz - 220 V / 60 Hz



WIDER

Bottle Coolers



Bottle Coolers /Wider



OUR 710 DC 1 YF



OUR 710 DC 1 YF P



OUR 710 DC 1 CF

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	732 / 664	732 / 664	707 / 645
Dimensions (External) (W x D x H) (mm)	775 x 740 x 2160	775 x 688 x 2215	775 x 740 x 2145
Dimensions (Internal) (W x D x H) (mm)	685 x 590 x 1685	685 x 590 x 1685	685 x 590 x 1480
Dimensions (External with Package) (W x D x H) (mm)	790 x 760 x 2250	790 x 760 x 2310	790 x 760 x 2250
Can Loading Capacity (Std / Max) (330 ml) / Facing	856 / 10	856 / 10	770 / 10
Lighting	LED on Top	LED on Top	LED on Top
Shelf Quantity	5	5	5
Cooler Refrigerant Type	R290	R290	R290
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	21	21	21
Loading (40' HC Container) (units)	45	45	45
Loading (Truck, 13,6 m) (units)	51	51	51
Weight Net / Gross (kg)	120 / 132	120 / 132	127 / 140

HIGHLIGHTS (May differ by models)

• 2200 mm / 3x1 mm ² Power Cable Length	• Gray Aluminum Flat Door Frame (For P Model)	• Internal Canopy (For CF Model)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Shelf Type PVC Coated Wire Shelf
• Light Switch	• Reversible Door (Depends on Models)	• Adjustable Front Foot (pcs)
• Fan Switch	• Built-in Handle	• Wheels (Roller)
• Tempered Double Glass	• Inner Body Type White Metal Body	• Packing Type Carton Packing + Wooden Pallet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)

OPTIONS(May differ according to models)

• Body in Different Colors	• Aluminium Frame Flat Door with (Spring Hinge)	• Sticker Application Left-Right Sides
• Internal Canopy	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Door Sticker Full
• Frameless Canopy (Metal)	• Plastic Door Frame in Different Colors	• Price Holders and Strips
• Night Cover	• Self Closing Door	• Digital and Analog Thermometer
• Door Lock	• American / Master Door Handle Set (Only with aluminum profile)	• Digital Thermostat
• Energy Lamp (Green)	• Inner Body Power LED Lighting	• R134a Refrigerant Gas
• Single Low-e Glass	• On Door 3D LED Lighting	• 115 V / 60 Hz - 220 V / 60 Hz




DOUBLE

Bottle Coolers



Bottle Coolers /Double

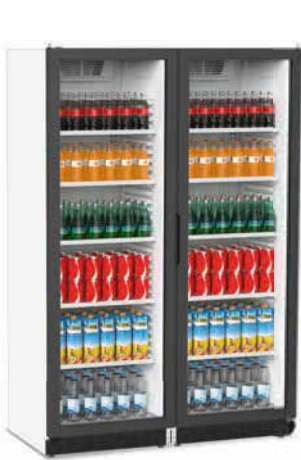

OUR 770 DC 2 YF



OUR 770 DC 2 CF



OUR 770 DC 4 CF

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	745 / 717	745 / 717	739 / 710
Dimensions (External) (W x D x H) (mm)	1200 x 605 x 1810	1200 x 605 x 1994	1200 x 605 x 1994
Dimensions (Internal) (W x D x H) (mm)	505 x 425 x 1615 (each side)	505 x 425 x 1615 (each side)	505 x 425 x 1615 (each side)
Dimensions (External with Package) (W x D x H) (mm)	1220 x 640 x 1925	1220 x 640 x 2070	1220 x 640 x 2070
Can Loading Capacity (Std / Max) (330 ml) / Facing	812 - 952 / 7 + 7	812 - 952 / 7 + 7	812 - 952 / 7 + 7
Lighting	LED on Top	LED on Top	LED on Top
Shelf Quantity	5 + 5	5 + 5	5 + 5
Cooler Refrigerant Type	R600a	R600a	R600a
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	13	13	13
Loading (40' HC Container) (units)	28	28	28
Loading (Truck, 13,6 m) (units)	42	42	42
Weight Net / Gross (kg)	150 / 158	160 / 172	165 / 177

HIGHLIGHTS (May differ by models)

• 2200 mm / 3x1 mm ² Power Cable Length	• Built-in Handle	• Adjustable Front Foot (pcs)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Wheels (Roller)
• Light Switch	• Inner Body Type White HIPS Plastic	• Packing Type Carton Packing + Wooden Pallet
• Fan Switch	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)
• Tempered Double Glass	• Internal Canopy (For CF Model)	
• Mechanical Thermostat Type	• Shelf Type PVC Coated Wire Shelf	

OPTIONS (May differ according to models)

• Plastic Kick Plate (Black Color)	• Residual Current Relay Plug Group	• Sticker Application Left-Right Sides
• Body in Different Colors	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Door Sticker Full
• Internal Canopy	• Plastic Door Frame in Different Colors	• Price Holders and Strips
• Night Cover	• Self Closing Door	• Digital and Analog Thermometer
• Door Lock	• American / Master Door Handle Set (Only with aluminum profile)	• R134a Refrigerant Gas
• Energy Lamp (Green)	• Inner Body Power LED Lighting	• 115 V / 60 Hz - 220 V / 60 Hz
• Single Low-e Glass	• On Door 3D LED Lighting	



TUDOR |
Bottle Coolers



Bottle Coolers /Tudor



OUR 1010 DC 2 YF



OUR 1010 SC 2 YF



OUR 1010 DC 2 CF



OUR 1010 SC 2 CF

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	945 / 852	945 / 852	913 / 828	876 / 797
Dimensions (External) (W x D x H) (mm)	980 x 740 x 2160	980 x 740 x 2160	980 x 740 x 2145	980 x 725 x 2145
Dimensions (Internal) (W x D x H) (mm)	890 x 590 x 1685	890 x 590 x 1685	890 x 590 x 1480	890 x 590 x 1480
Dimensions (External with Package) (W x D x H) (mm)	1000 x 760 x 2250	1000 x 760 x 2250	1000 x 760 x 2250	1000 x 760 x 2250
Can Loading Capacity (Std / Max) (330 ml) / Facing	1058 / 13	1058 / 13	1001 / 13	1001 / 13
Lighting	LED on Top	LED on Top	LED on Top	LED on Top
Shelf Quantity	4	4	4	4
Cooler Refrigerant Type	R290	R290	R290	R290
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	17	17	17	17
Loading (40' HC Container) (units)	36	36	36	36
Loading (Truck, 13,6 m) (units)	39	39	39	39
Weight Net / Gross (kg)	158 / 171	158 / 171	158 / 171	158 / 171

HIGHLIGHTS (May differ by models)

• 2200 mm / 3x1 mm ² Power Cable Length	• Metal Kick Plate	• Internal Canopy (For CF Model)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Shelf Type PVC Coated Wire Shelf
• Light Switch	• Gray Aluminum Sliding Frame (For SC Model)	• Adjustable Front Foot (pcs)
• Fan Switch	• Built-in Handle	• Wheels (Roller)
• Tempered Double Glass	• White Metal Inner Body	• Packing Type Carton Packing + Wooden Pallet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)

OPTIONS (May differ according to models)

• Body in Different Colors	• Aluminium Frame Flat Door with (Spring Hinged)	• Sticker Application Left-Right Sides
• Internal Canopy	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Door Sticker Full
• Frameless Canopy (Metal)	• Plastic Door Frame in Different Colors	• Price Holders and Strips
• Night Cover	• Self Closing Door	• Digital and Analog Thermometer
• Door Lock	• American / Master Door Handle Set (Only with aluminum profile)	• Digital Thermostat
• Energy Lamp (Green)	• Residual Current Relay Plug Group	• R134a Refrigerant Gas
• Single Low-e Glass	• On Door 3D LED Lighting	• 115 V / 60 Hz - 220 V / 60 Hz



BIG
Bottle Coolers



Bottle Coolers /Big



OUR 1210 DC 2 YF



OUR 1210 SC 2 YF



OUR 1210 DC 2 CF



OUR 1210 SC 2 CF

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	1180 / 1067	1126 / 1020	1140 / 1037	1092 / 996
Dimensions (External) (W x D x H) (mm)	1200 x 740 x 2160	1200 x 725 x 2160	1200 x 740 x 2145	1200 x 725 x 2145
Dimensions (Internal) (W x D x H) (mm)	1110 x 590 x 1685	1110 x 590 x 1685	1110 x 590 x 1480	1110 x 590 x 1480
Dimensions (External with Package) (W x D x H) (mm)	1215 x 760 x 2250	1215 x 760 x 2250	1215 x 760 x 2250	1215 x 760 x 2250
Can Loading Capacity (Std / Max) (330 ml) / Facing	1232 / 16	1232 / 16	1232 / 16	1232 / 16
Lighting	LED on Top	LED on Top	LED on Top	LED on Top
Shelf Quantity	4	4	4	4
Cooler Refrigerant Type	R290	R290	R290	R290
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	13	13	13	13
Loading (40' HC Container) (units)	28	28	28	28
Loading (Truck, 13,6 m) (units)	34	34	34	34
Weight Net / Gross (kg)	184 / 199	184 / 199	195 / 210	195 / 210

HIGHLIGHTS (May differ by models)

• 2200 mm / 3x1 mm ² Power Cable Length	• Metal Kick Plate	• Internal Canopy (For CF Model)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Shelf Type PVC Coated Wire Shelf
• Light Switch	• Gray Aluminum Sliding Frame (For SC Model)	• Adjustable Front Foot (pcs)
• Fan Switch	• Built-in Handle	• Wheels (Roller)
• Tempered Double Glass	• White Metal Inner Body	• Packing Type Carton Packing + Wooden Pallet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)

OPTIONS (May differ according to models)

• Body in Different Colors	• Aluminium Frame Flat Door with (Spring Hinged)	• Sticker Application Left-Right Sides
• Internal Canopy	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Door Sticker Full
• Frameless Canopy (Metal)	• Plastic Door Frame in Different Colors	• Price Holders and Strips
• Night Cover	• Self Closing Door	• Digital and Analog Thermometer
• Door Lock	• American / Master Door Handle Set (Only with aluminum profile)	• Digital Thermostat
• Energy Lamp (Green)	• Inner Body Power LED Lighting	• R134a Refrigerant Gas
• Single Low-e Glass	• On Door 3D LED Lighting	• 115 V / 60 Hz - 220 V / 60 Hz



LARGE

Bottle Coolers



Bottle Coolers /Large



OUR 1510 DC 2 YF



OUR 1510 DC 3 YF

STANDARD TECHNICAL SPECIFICATIONS		
Volume, Gross / Net (l)	1497 / 1237	1491 / 1215
Dimensions (External) (W x D x H) (mm)	1500 x 690 x 2075	1500 x 690 x 2075
Dimensions (Internal) (W x D x H) (mm)	1410 x 590 x 1548	1410 x 590 x 1548
Dimensions (External with Package) (W x D x H) (mm)	1510 x 760 x 2235	1510 x 760 x 2235
Can Loading Capacity (Std / Max) (330 ml) / Facing	1528 / 20	1476 / 20
Lighting	LED on Top	LED on Top
Shelf Quantity	4 + 4	4 + 4 + 4
Cooler Refrigerant Type	R290	R290
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	10	10
Loading (40' HC Container) (units)	22	22
Loading (Truck, 13,6 m) (units)	27	27
Weight Net / Gross (kg)	206 / 220	213 / 227

HIGHLIGHTS (May differ by models)		
• 2200 mm / 3x1,5 mm² Power Cable Length	• Metal Kick Plate	• Shelf Type PVC Coated Wire Shelf
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Adjustable Front Foot (pcs)
• Light Switch	• Built-in Handle	• Wheels (Roller)
• Fan Switch	• White Metal inner Body	• Packing Type Carton Packing + Wooden Pallet
• Tempered Double Glass	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)
• Electronicl Thermostat Type	• Internal Canopy (For CF Model)	

OPTIONS (May differ according to models)		
• Body in Different Colors	• Aluminium Frame Flat Door with (Spring Hinged)	• Sticker Application Left-Right Sides
• Internal Canopy	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Door Sticker Full
• Residual Current Relay Plug Group	• Plastic Door Frame in Different Colors	• Price Holders and Strips
• Night Cover	• Self Closing Door	• Digital and Analog Thermometer
• Door Lock	• American / Master Door Handle Set (Only with aluminum profile)	• R134a Refrigerant Gas
• Energy Lamp (Green)	• Inner Body Power LED Lighting	• 115 V / 60 Hz - 220 V / 60 Hz
• Single Low-e Glass	• On Door 3D LED Lighting	



UNDERZER❄️
-3.5 °C Bottle Coolers



HIGHLIGHTS

Door Glass with Resistance



There is no clouding or sweating on the glass with resistance. Provides a clear interior view.

LED Lighting



Right and left on the door + inner body top LED lighting provides maximum illumination.

Digital Thermostat



You can completely control the performance of your cooler.

-3.5 °C Bottle Coolers /UNDERZERO



OUR 510 DC 1 CF UZ



OUR 510 DC 1 YF UZ



OUR 710 DC 1 CF UZ



OUR 710 DC 1 YF UZ

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	567 / 516	588 / 531	707 / 645	732 / 664
Dimensions (External) (W x D x H) (mm)	640 x 740 x 2145	640 x 740 x 2160	775 x 740 x 2145	775 x 740 x 2145
Dimensions (Internal) (W x D x H) (mm)	550 x 590 x 1480	550 x 590 x 1685	685 x 590 x 1480	685 x 590 x 1480
Dimensions (External with Package) (W x D x H) (mm)	660 x 760 x 2250	660 x 760 x 2250	790 x 760 x 2250	790 x 760 x 2250
Can Loading Capacity (Std / Max) (330 ml) / Facing	616 / 8	616 / 8	770 / 10	770 / 10
Lighting	LED on Top	LED on Top	LED on Top	LED on Top
Shelf Quantity	5	5	5	5
Cooler Refrigerant Type	R290	R290	R290	R290
Cooler Climate Class	4/CC2K3 (32°C/65% Rh)	4/CC2K3 (32°C/65% Rh)	4/CC2K3 (32°C/65% Rh)	4/CC2K3 (32°C/65% Rh)
Cooler Temperature Range (°C)	-3,5 / +1	-3,5 / +1	-3,5 / +1	-3,5 / +1
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	24	24	21	21
Loading (40' HC Container) (units)	54	54	45	45
Loading (Truck, 13,6 m) (units)	60	60	54	54
Weight Net / Gross (kg)	105 / 115	105 / 115	127 / 140	127 / 140

HIGHLIGHTS (May differ by models)


• 2200 mm / 3x1 mm ² Power Cable Length	• Metal Kick Plate	• Internal Canopy (For CF Model)
• Evaporator Type Roll Bond	• Black Color Plastic Frame Door	• Shelf Type PVC Coated Wire Shelf
• 2D Door LED Lighting + Inner Body LED Lighting	• Light Switch	• Adjustable Front Foot (pcs)
• Fan Switch	• Built-in Handle	• Wheels (Roller)
• Tempered Double Glass	• White Metal Inner Body	• Packing Type Carton Packing + Wooden Pallet
• Digital Thermostat	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)

OPTIONS (May differ according to models)

• Body in Different Colors	• Single Low-e Glass	• Residual Current Relay Plug Group
• Internal Canopy	• Aluminium Frame Flat Door with (Spring Hinged)	• On Door 4D LED Lighting
• Frameless Canopy (Metal)	• Aluminium Gray Door Frame (Powder Coat, Inox Grey)	• Sticker Application Left-Right Sides
• Night Cover	• Plastic Door Frame in Different Colors	• Price Holders and Strips
• Door Lock	• Self Closing Door	• R290 Refrigerant Gas
• Inner Body Power LED Lighting	• American / Master Door Handle Set (Only with aluminum profile)	• Flat Door Front Lighting 4D



WINEY
Wine Coolers



OPTIONS

Touch Glass Control Panel



Electronically controlled touch glass control panel provides a more elegant appearance with its flat door feature.

Inclined Wire Wine Shelf (Black / 4 wine, 1 pcs.)



You can highlight your products with this option.

Wooden Patterned Outer Body Sheet



You can bring naturalness to the forefront with wooden appearance.

Wine Coolers /Winey



OUR 385 DC 1 YW P



OUR 385 DC 1 CW



OUR 385 DC 1 PW

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	373 / 358	373 / 358	373 / 358
Dimensions (External) (W x D x H) (mm)	595 x 605 x 1832	595 x 605 x 1994	595 x 605 x 1832
Dimensions (Internal) (W x D x H) (mm)	505 x 425 x 1615	505 x 425 x 1615	505 x 425 x 1615
Dimensions (External with Package) (W x D x H) (mm)	615 x 640 x 1985	615 x 640 x 2070	615 x 640 x 1985
Can Loading Capacity (Std / Max) (330 ml) / Facing	406 - 60 Wine Bottles (750 ml) / 7	406 - 60 Wine Bottles (750 ml) / 7	406 - 60 Wine Bottles (750 ml) / 7
Lighting	Top Power Led	Top Power Led	Top Power Led
Shelf Quantity	5	5	5
Cooler Refrigerant Type	R600a	R600a	R600a
Cooler Climate Class	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)	4/CC2K4 (32°C/65% Rh)
Cooler Temperature Range (°C)	+6 / +20	+6 / +20	+6 / +20
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	27	27	27
Loading (40' HC Container) (units)	57	57	57
Loading (Truck, 13,6 m) (units)	84	84	84
Weight Net / Gross (kg)	80 / 88	80 / 88	80 / 88

HIGHLIGHTS (May differ by models)

• 2200 mm / 3x1 mm ² Power Cable Length	• Plastic Frame Flat Door With (Black)	• Internal Canopy (For CW Model)
• Evaporator Type Roll Bond	• Full Glass Door with Touch Control (For PW Model)	• Beech Wood Shelves
• Light Switch	• Matte Black Design	• Adjustable Front Foot (pcs)
• Fan Switch	• Built-in Handle	• Wheels (Roller)
• Tempered Double Glass	• Precisely Adjustable Working Temperature	• Packing Type Carton Packing + Wooden Pallet
• Digital Thermostat	• Anti-Vibration Rubber Compressor Bearing	• Standard Certificates (CE, CB, EMC)

OPTIONS (May differ according to models)

• Wooden Patterned Outer Body Sheet	• Remote Lock	• On Door 3D LED Lighting
• Touch Glass Control Panel	• Door Lock	• Sticker Application Left-Right Sides
• Frameless Canopy (Metal)	• Residual Current Relay Plug Group	• Sticker Application Canopy
• Standard Wire Shelf (Black)	• Aluminium Frame Flat Door with (Black)	• Price Holders and Strips
• Inclined Wire Wine Shelf (Black / 4 wine, 1 pcs.)	• Single Low-e Glass	• Passive RFID
• Additional Balance Feet (2 pcs.)	• Interior Light LED Right and Left + Canopy LED	• 220 V / 60 Hz




COOLS
Bottle Coolers



OPTIONS

Commercial Wire Basket

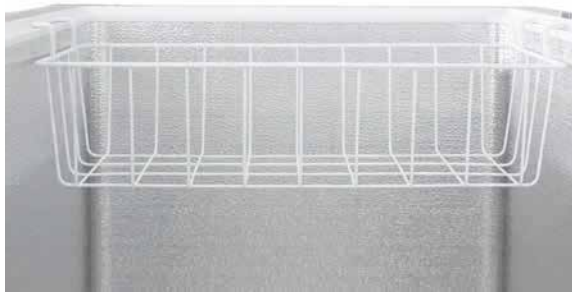

You can choose this option for easy and practical loading.

Color Frame



You can increase the visual power of your cooler by your corporate colored frames.

LED Illuminated Canopy



You can highlight your visual designs for advertising purposes with the canopy.

Bottle Coolers / Cools

160



OYS 160 MD DC



OYS 160 MA DC



OYS 160 MD BC



OYS 160 MA BC



OYS 160 PA BC

STANDARD TECHNICAL SPECIFICATIONS

Gross Volume (l)	133	112	139	118	118
Net Volume (l)	107	80	107	80	80
Dimensions (External with Castors) (W x D x H) (mm)	573 x 573 x 879	577 x 578 x 879	573 x 573 x 879	577 x 578 x 879	578 x 578 x 878
Dimensions (Internal) (W x D x H) (mm)	463 x 463 x 666	463 x 463 x 552/658	463 x 463 x 666	463 x 463 x 552/658	463 x 463 x 587/655
Dimensions (External with Package) (W x D x H) (mm)	605 x 595 x 850	605 x 595 x 850	605 x 595 x 850	605 x 595 x 850	605 x 595 x 850
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Cooler Refrigerant Type	R600a	R600a	R600a	R600a	R600a
Cooler Climate Class	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	54	54	54	54	54
Loading (40' HC Container) (units)	171	171	171	171	171
Loading (Truck, 13,6 m) (units)	264	264	264	264	264
Net Weight (kg)	40	41	42	43	44
Gross Weight (kg)	47	47	47	47	47

HIGHLIGHTS (May differ by models)

• 3000 mm / 3x1 mm ² Power Cable Length	• Inner Body Type 0.45mm Stucco Aluminium sheet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,7 mm
• Power Cable Winding and Plug Fixing Details	• Aluminum Corner Covers
• Large Sliding Glass Handle and Lock	• Standard Certificates (CE, CB, EMC)
• Monoblock Frame, 4 mm Tempered Low-e Sliding Glass	• Scraper
• Galvanized Base Sheet	• Water Drain System

OPTIONS (May differ according to models)

• Commercial Wire Basket	• Residual Current Relay Plug Group
• Colored Frame	• Passive RFID
• White Metal Inner Liner	• Ground Mounting Kit
• LED Illuminated Canopy	• Digital Thermostat
• High Wooden Palet (Wheel-mounted)	• Analog Thermometer
• Flat Sliding Glass	• Digital Thermometer
• Sticker Application (4 Sides)	





COOLS
Bottle | Coolers



Bottle Coolers / Cools



OYS 210 MD DC



OYS 210 MA DC



OYS 210 MD BC



OYS 210 MA BC




OYS 210 PA BC

STANDARD TECHNICAL SPECIFICATIONS					
Gross Volume (l)	208	184	223	198	200
Net Volume (l)	170	137	170	137	137
Dimensions (External with Castors) (W x D x H) (mm)	763 x 653 x 879	767 x 659 x 879	763 x 653 x 879	767 x 659 x 879	765 x 660 x 878
Dimensions (Internal) (W x D x H) (mm)	639 x 529 x 666	639 x 529 x 552/658	639 x 529 x 666	639 x 529 x 552/658	639 x 529 x 587/655
Dimensions (External with Package) (W x D x H) (mm)	785 x 685 x 850	785 x 685 x 850	785 x 685 x 850	785 x 685 x 850	785 x 685 x 850
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Cooler Refrigerant Type	R600a	R600a	R600a	R600a	R600a
Cooler Climate Class	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	46	46	46	46	46
Loading (40' HC Container) (units)	147	147	147	147	147
Loading (Truck, 13,6 m) (units)	171	171	171	171	171
Net Weight (kg)	45	46	47	48	49
Gross Weight (kg)	53	53	53	53	53

HIGHLIGHTS (May differ by models)	
• 3000 mm / 3x1 mm² Power Cable Length	• Inner Body Type 0.45mm Stucco Aluminium sheet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,7 mm
• Power Cable Winding and Plug Fixing Details	• Aluminum Corner Covers
• Large Sliding Glass Handle and Lock	• Standard Certificates (CE, CB, EMC)
• Monoblock Frame, 4 mm Tempered Low-e Sliding Glass	• Scraper
• Galvanized Base Sheet	• Water Drain System

OPTIONS (May differ according to models)	
• Commercial Wire Basket	• Residual Current Relay Plug Group
• Colored Frame	• Passive RFID
• White Metal Inner Liner	• Ground Mounting Kit
• LED Illuminated Canopy	• Digital Thermostat
• High Wooden Palet (Wheel-mounted)	• Analog Thermometer
• Flat Sliding Glass	• Digital Thermometer
• Sticker Application (4 Sides)	

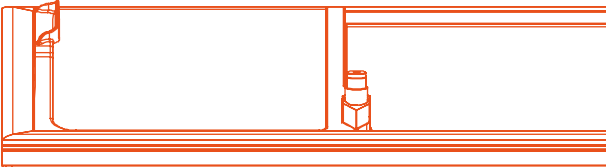



COOLS
Bottle Coolers



Bottle Coolers / Cools



OYS 310 MD DC



OYS 310 MA DC



OYS 310 MD BC



OYS 310 MA BC




OYD 310 PA BC

STANDARD TECHNICAL SPECIFICATIONS				
Gross Volume (l)	314	278	333	297
Net Volume (l)	258	210	258	210
Dimensions (External with Castors) (W x D x H) (mm)	1039 x 653 x 879	1043 x 659 x 879	1039 x 653 x 879	1043 x 659 x 879
Dimensions (Internal) (W x D x H) (mm)	915 x 529 x 666	915 x 529 x 552/658	915 x 529 x 666	915 x 529 x 552/658
Dimensions (External with Package) (W x D x H) (mm)	1065 x 685 x 850	1065 x 685 x 850	1065 x 685 x 850	1065 x 685 x 850
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Cooler Refrigerant Type	R600a	R600a	R600a	R600a
Cooler Climate Class	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)	4 / CC2K4 (32°C / 65% Rh)
Cooler Temperature Range (°C)	+1 / +9	+1 / +9	+1 / +9	+1 / +9
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	32	32	32	32
Loading (40' HC Container) (units)	102	102	102	102
Loading (Truck, 13,6 m) (units)	132	132	132	132
Net Weight (kg)	55	55	55	55
Gross Weight (kg)	68	68	68	68

HIGHLIGHTS (May differ by models)	
• 3000 mm / 3x1 mm² Power Cable Length	• Inner Body Type 0.45mm Stucco Aluminium sheet
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,7 mm
• Power Cable Winding and Plug Fixing Details	• Aluminum Corner Covers
• Large Sliding Glass Handle and Lock	• Standard Certificates (CE, CB, EMC)
• Monoblock Frame, 4 mm Tempered Low-e Sliding Glass	• Scraper
• Galvanized Base Sheet	• Water Drain System

OPTIONS (May differ according to models)	
• Commercial Wire Basket	• Residual Current Relay Plug Group
• Colored Frame	• Passive RFID
• White Metal Inner Liner	• Ground Mounting Kit
• LED Illuminated Canopy	• Digital Thermostat
• High Wooden Palet (Wheel-mounted)	• Analog Thermometer
• Flat Sliding Glass	• Digital Thermometer
• Sticker Application (4 Sides)	

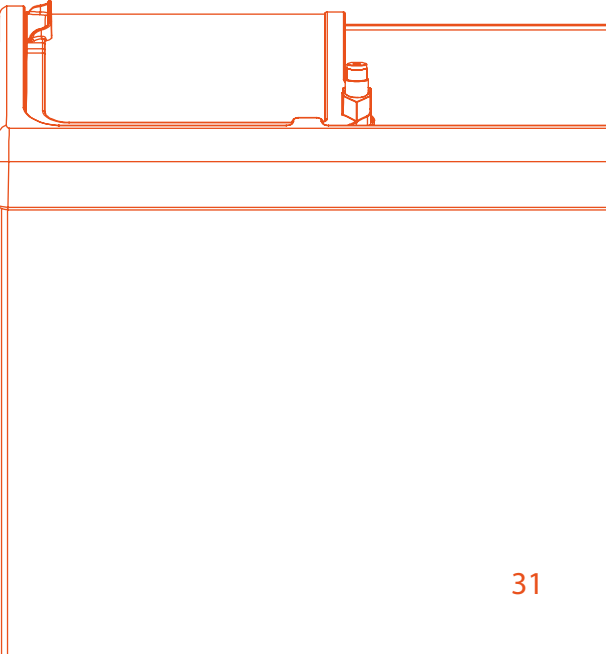



SLIDEY
Showcase Conservators



OPTIONS

Digital and Analog Thermometer



You can see the inside temperature of your cooler more easily.

Color Frame



You can increase the visual power of your cooler by your corporate colored frames.

Passive RFID



You can follow your conservator with that RFID in the body which cannot be removed.

Showcase Conservators / Slidey

160



OUS 160 MD DC



OUS 160 MA DC



OUS 160 MD BC



OUS 160 MA BC



OUS 160 PA BC

STANDARD TECHNICAL SPECIFICATIONS


Volume, Gross / Net (l)	133 / 107	112 / 80	139 / 107	118 / 80	118 / 80
Dimensions (External with Castors) (W x D x H) (mm)	573 x 573 x 879	577 x 578 x 879	573 x 573 x 879	577 x 578 x 879	578 x 578 x 879
Dimensions (Internal) (W x D x H) (mm)	463 x 463 x 666	463 x 463 x 552/658	463 x 463 x 666	463 x 463 x 552/658	463 x 463 x 587/655
Dimensions (External with Package) (W x D x H) (mm)	605 x 595 x 850	605 x 595 x 850	605 x 595 x 850	605 x 595 x 850	605 x 595 x 850
Temperature Protection Time (-19/-9°C) (Hour)	6	6	6	6	6
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Cooler Refrigerant Type	R600a	R600a	R600a	R600a	R600a
Cooler Climate Class	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)
Cooler Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24	-18 / -24	-18 / -24
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	54	54	54	54	54
Loading (40' HC Container) (units)	171	171	171	171	171
Loading (Truck, 13,6 m) (units)	264	264	264	264	264
Net Weight (kg)	40	41	42	43	44
Gross Weight (kg)	47	47	47	47	47

HIGHLIGHTS (May differ by models)

- | | |
|--|--|
| • 3000 mm / 3x1 mm ² Power Cable Length | • Inner Body Type 0.45mm Stucco Aluminium sheet |
| • Mechanical Thermostat Type | • Outer Body Type White painted on galvanized sheet 0,7 mm |
| • Power Cable Winding and Plug Fixing Details | • Aluminum Corner Covers |
| • Large Sliding Glass Handle and Lock | • Standard Certificates (CE, CB, EMC) |
| • Monoblock Frame, 4 mm Tempered Low-e Sliding Glass | • Scraper |
| • Galvanized Base Sheet | • Water Drain System |

OPTIONS (May differ according to models)

- | | |
|-------------------------------------|-------------------------------------|
| • Commercial Wire Basket | • Residual Current Relay Plug Group |
| • Colored Frame | • Passive RFID |
| • White Metal Inner Liner | • Ground Mounting Kit |
| • LED Illuminated Canopy | • Digital Thermostat |
| • High Wooden Palet (Wheel-mounted) | • Analog Thermometer |
| • Flat Sliding Glass | • Digital Thermometer |
| • Sticker Application (4 Sides) | |

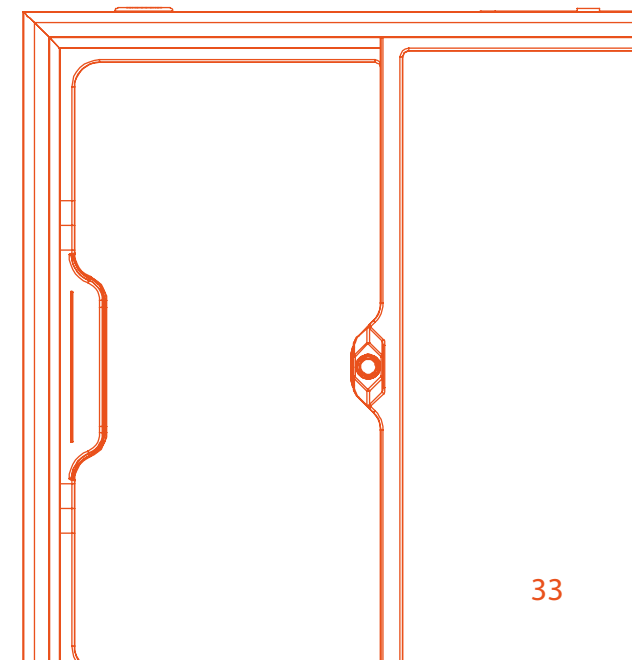



SLIDEY |
Showcase Conservators



OPTIONS

Commercial Wire Basket



You can choose this option for easy and practical loading.

Digital Thermostat



You can completely control the performance of your cooler.

Sticker Application



Your brand and products will always be at the forefront.

Showcase Conservators / Slidey

210



OUS 210 MD DC



OUS 210 MA DC



OUS 210 MD BC



OUS 210 MA BC



OUS 210 PA BC

STANDARD TECHNICAL SPECIFICATIONS


Volume, Gross / Net (l)	208 / 170	184 / 137	223 / 170	198 / 137	200 / 137
Dimensions (External with Castors) (W x D x H) (mm)	763 x 653 x 879	767 x 659 x 879	763 x 653 x 879	767 x 659 x 879	765 x 660 x 879
Dimensions (Internal) (W x D x H) (mm)	639 x 529 x 666	639 x 529 x 552/658	639 x 529 x 666	639 x 529 x 552/658	639 x 529 x 587/655
Dimensions (External with Package) (W x D x H) (mm)	785 x 685 x 850	785 x 685 x 850	785 x 685 x 850	785 x 685 x 850	785 x 685 x 850
Temperature Protection Time (-19/-9°C) (Hour)	8	8	8	8	8
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Cooler Refrigerant Type	R600a	R600a	R600a	R600a	R600a
Cooler Climate Class	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)
Cooler Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24	-18 / -24	-18 / -24
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	46	46	46	46	46
Loading (40' HC Container) (units)	147	147	147	147	147
Loading (Truck, 13,6 m) (units)	171	171	171	171	171
Net Weight (kg)	45	46	47	48	49
Gross Weight (kg)	53	53	53	53	53

HIGHLIGHTS (May differ by models)

- | | |
|--|--|
| • 3000 mm / 3x1 mm ² Power Cable Length | • Inner Body Type 0.45mm Stucco Aluminium sheet |
| • Mechanical Thermostat Type | • Outer Body Type White painted on galvanized sheet 0,7 mm |
| • Power Cable Winding and Plug Fixing Details | Aluminum Corner Covers |
| • Large Sliding Glass Handle and Lock | • Standard Certificates (CE, CB, EMC) |
| • Monoblock Frame, 4 mm Tempered Low-e Sliding Glass | • Scraper |
| • Galvanized Base Sheet | • Water Drain System |


OPTIONS (May differ according to models)

- | | |
|-------------------------------------|-------------------------------------|
| • Commercial Wire Basket | • Residual Current Relay Plug Group |
| • Colored Frame | • Passive RFID |
| • White Metal Inner Liner | • Ground Mounting Kit |
| • LED Illuminated Canopy | • Digital Thermostat |
| • High Wooden Palet (Wheel-mounted) | Analog Thermometer |
| • Flat Sliding Glass | Digital Thermometer |

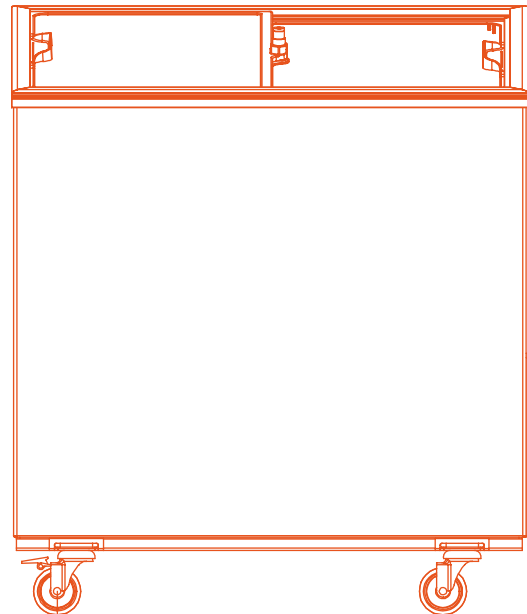

OPTIONS

White Metal Inner Body

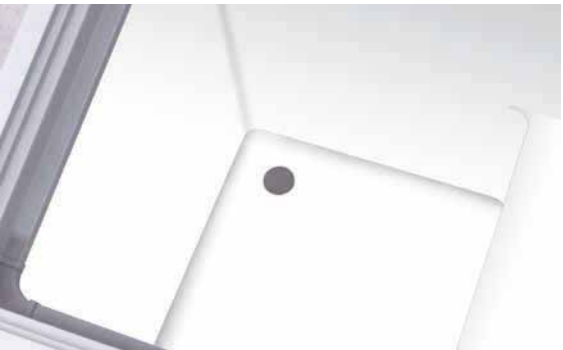

You can easily clean the inner body of your conservator. * Option for 310-410-510-610 Type Cabinets.

Inner Body Lighting



The product is illuminated by standard Inner Body Lighting without disturbing the customer's eyes. * Option for 310-410-510-610 Type Cabinets.

LED Illuminated Canopy



You can highlight your visual designs for advertising purposes with the canopy.

Showcase Conservators / Slidey

310



OUS 310 MD DC

OUS 310 MA DC

OUS 310 MD BC

OUS 310 MA BC

OUS 310 PA BC

STANDARD TECHNICAL SPECIFICATIONS

Volume, Gross / Net (l)	314 / 258	278 / 210	333 / 258	297 / 210	300 / 210
Dimensions (External with Castors) (W x D x H) (mm)	1039 x 653 x 879	1043 x 659 x 879	1039 x 653 x 879	1043 x 659 x 879	1041 x 660 x 878
Dimensions (Internal) (W x D x H) (mm)	915 x 529 x 666	915 x 529 x 552/658	915 x 529 x 666	915 x 529 x 552/658	915 x 529 x 587/655
Dimensions (External with Package) (W x D x H) (mm)	1065 x 685 x 850	1065 x 685 x 850	1065 x 685 x 850	1065 x 685 x 850	1065 x 685 x 850
Temperature Protection Time (-19/-9°C) (Hour)	13	13	13	13	13
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Cooler Refrigerant Type	R290	R290	R290	R290	R290
Cooler Climate Class	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)
Cooler Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24	-18 / -24	-18 / -24
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	32	32	32	32	32
Loading (40' HC Container) (units)	102	102	102	102	102
Loading (Truck, 13,6 m) (units)	132	132	132	132	132
Net Weight (kg)	55	55	55	55	55
Gross Weight (kg)	68	68	68	68	68


HIGHLIGHTS (May differ by models)

- | | |
|--|--|
| • 3000 mm / 3x1 mm ² Power Cable Length | • Inner Body Type 0.45mm Stucco Aluminium sheet |
| • Mechanical Thermostat Type | • Outer Body Type White painted on galvanized sheet 0,7 mm |
| • Power Cable Winding and Plug Fixing Details | • Aluminum Corner Covers |
| • Large Sliding Glass Handle and Lock | • Standard Certificates (CE, CB, EMC) |
| • Monoblock Frame, 4 mm Tempered Low-e Sliding Glass | • Scraper |
| • Galvanized Base Sheet | • Water Drain System |

OPTIONS (May differ according to models)

- | | |
|-------------------------------------|-------------------------------------|
| • Commercial Wire Basket | • Residual Current Relay Plug Group |
| • Colored Frame | • Passive RFID |
| • White Metal Inner Liner | • Ground Mounting Kit |
| • LED Illuminated Canopy | • Digital Thermostat |
| • High Wooden Palet (Wheel-mounted) | • Analog Thermometer |
| • Flat Sliding Glass | • Digital Thermometer |
| • Sticker Application (4 Sides) | |

SLIDEY
Showcase Conservators

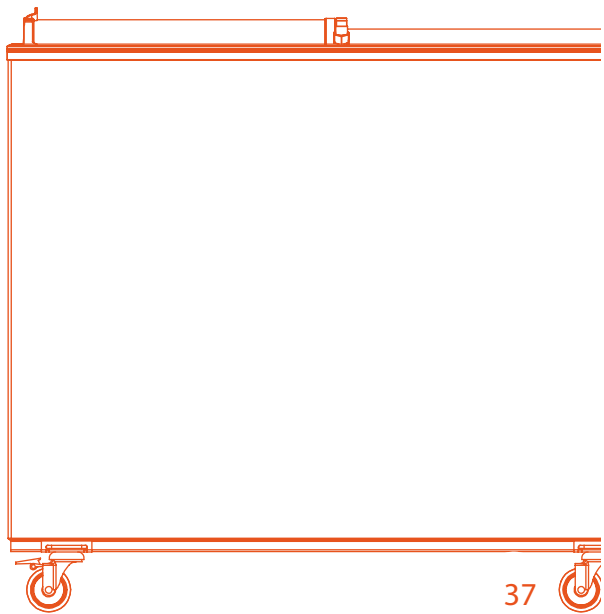



SLIDEY |
Showcase|Conservators



OUS 410 MD DC

OUS 410 MA DC

OUS 410 MD BC

OUS 410 MA BC

OUS 410 PA BC

STANDARD TECHNICAL SPECIFICATIONS


Volume, Gross / Net (l)	416 / 345	371 / 283	442 / 345	397 / 283	400 / 283
Dimensions (External with Castors) (W x D x H) (mm)	1314 x 653 x 904	1318 x 659 x 904	1314 x 653 x 904	1318 x 659 x 904	1316 x 660 x 904
Dimensions (Internal) (W x D x H) (mm)	1190 x 529 x 666	1190 x 529 x 552/658	1190 x 529 x 666	1190 x 529 x 552/658	1190 x 529 x 587/655
Dimensions (External with Package) (W x D x H) (mm)	1345 x 685 x 850	1345 x 685 x 850	1345 x 685 x 850	1345 x 685 x 850	1345 x 685 x 850
Temperature Protection Time (-19/-9°C) (Hour)	11	11	11	11	11
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Cooler Refrigerant Type	R290	R290	R290	R290	R290
Cooler Climate Class	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)
Cooler Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24	-18 / -24	-18 / -24
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	24	24	24	24	24
Loading (40' HC Container) (units)	75	75	75	75	75
Loading (Truck, 13,6 m) (units)	90	90	90	90	90
Net Weight (kg)	65	65	65	65	65
Gross Weight (kg)	79	79	79	79	79

HIGHLIGHTS (May differ by models)

- 3000 mm / 3x1 mm² Power Cable Length
- Mechanical Thermostat Type
- Power Cable Winding and Plug Fixing Details
- Large Sliding Glass Handle and Lock
- Monoblock Frame, 4 mm Tempered Low-e Sliding Glass
- Galvanized Base Sheet
- Inner Body Type 0.45mm Stucco Aluminium sheet
- Outer Body Type White painted on galvanized sheet 0,7 mm
- Aluminum Corner Covers
- Standard Certificates (CE, CB, EMC)
- Scraper
- Water Drain System

OPTIONS (May differ according to models)

- Commercial Wire Basket
- Colored Frame
- White Metal Inner Liner
- LED Illuminated Canopy
- High Wooden Palet (Wheel-mounted)
- Flat Sliding Glass
- Sticker Application (4 Sides)
- Residual Current Relay Plug Group
- Passive RFID
- Ground Mounting Kit
- Digital Thermostat
- Analog Thermometer
- Digital Thermometer

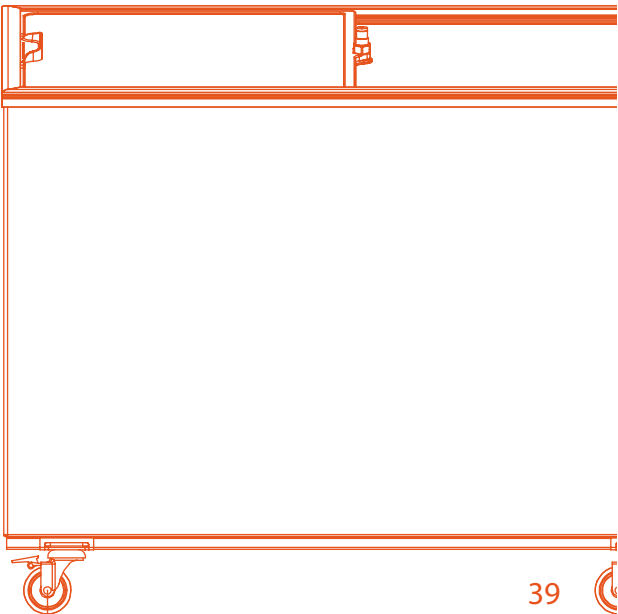



SLIDEY |
Showcase Conservators



OUS 510 MD DC

OUS 510 MA DC

OUS 510 MD BC

OUS 510 MA BC

OUS 510 PA BC

STANDARD TECHNICAL SPECIFICATIONS


Volume, Gross / Net (l)	478 / 400	432 / 330	512 / 411	461 / 330	464 / 330
Dimensions (External with Castors) (W x D x H) (mm)	1489 x 653 x 904	1494 x 659 x 904	1489 x 653 x 904	1494 x 659 x 904	1492 x 660 x 904
Dimensions (Internal) (W x D x H) (mm)	1366 x 529 x 666	1366 x 529 x 552/658	1366 x 529 x 666	1366 x 529 x 552/658	1366 x 529 x 587/655
Dimensions (External with Package) (W x D x H) (mm)	1514 x 685 x 850	1514 x 685 x 850	1514 x 685 x 850	1514 x 685 x 850	1514 x 685 x 850
Temperature Protection Time (-19/-9°C) (Hour)	11	11	11	11	12
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Cooler Refrigerant Type	R290	R290	R290	R290	R290
Cooler Climate Class	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)
Cooler Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24	-18 / -24	-18 / -24
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	22	22	22	22	22
Loading (40' HC Container) (units)	72	72	72	72	72
Loading (Truck, 13,6 m) (units)	78	78	78	78	78
Net Weight (kg)	75	75	75	75	75
Gross Weight (kg)	90	90	90	90	90

HIGHLIGHTS (May differ by models)

- 3000 mm / 3x1 mm² Power Cable Length
- Mechanical Thermostat Type
- Power Cable Winding and Plug Fixing Details
- Large Sliding Glass Handle and Lock
- Monoblock Frame, 4 mm Tempered Low-e Sliding Glass
- Galvanized Base Sheet
- Inner Body Type 0.45mm Stucco Aluminium sheet
- Outer Body Type White painted on galvanized sheet 0,7 mm
- Aluminum Corner Covers
- Standard Certificates (CE, CB, EMC)
- Scraper
- Water Drain System

OPTIONS (May differ according to models)

- Commercial Wire Basket
- Colored Frame
- White Metal Inner Liner
- LED Illuminated Canopy
- High Wooden Palet (Wheel-mounted)
- Flat Sliding Glass
- Sticker Application (4 Sides)
- Residual Current Relay Plug Group
- Passive RFID
- Ground Mounting Kit
- Digital Thermostat
- Analog Thermometer
- Digital Thermometer

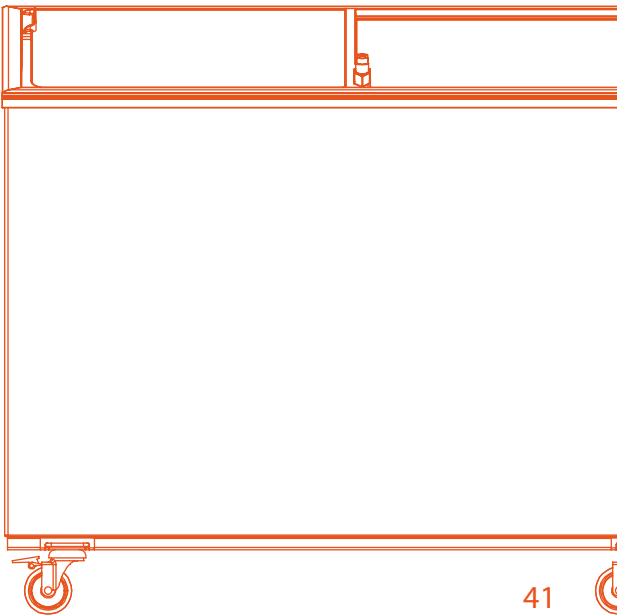



SLIDEY |
Showcase Conservators



OUS 610 MD DC

OUS 610 MA DC

OUS 610 MD BC

OUS 610 MA BC

OUS 610 PA BC

STANDARD TECHNICAL SPECIFICATIONS


Volume, Gross / Net (l)	582 / 490	527 / 438	625 / 490	563 / 438	567 / 438
Dimensions (External with Castors) (W x D x H) (mm)	1772 x 653 x 904	1772 x 653 x 904	1772 x 653 x 904	1772 x 653 x 904	1775 x 660 x 904
Dimensions (Internal) (W x D x H) (mm)	1649 x 529 x 666	1649 x 529 x 552/658	1649 x 529 x 666	1649 x 529 x 552/658	1649 x 529 x 587/655
Dimensions (External with Package) (W x D x H) (mm)	1806 x 685 x 850	1806 x 685 x 850	1806 x 685 x 850	1806 x 685 x 850	1806 x 685 x 850
Temperature Protection Time (-19/-9°C) (Hour)	11	11	11	11	12
Wheel	6 pcs (3 with Brake)	6 pcs (3 with Brake)	6 pcs (3 with Brake)	6 pcs (3 with Brake)	6 pcs (3 with Brake)
Cooler Refrigerant Type	R290	R290	R290	R290	R290
Cooler Climate Class	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)
Cooler Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24	-18 / -24	-18 / -24
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	18	18	18	18	18
Loading (40' HC Container) (units)	57	57	57	57	57
Loading (Truck, 13,6 m) (units)	63	63	63	63	63
Net Weight (kg)	85	85	85	85	85
Gross Weight (kg)	92	92	92	92	92

HIGHLIGHTS (May differ by models)

- 3000 mm / 3x1 mm² Power Cable Length
- Mechanical Thermostat Type
- Power Cable Winding and Plug Fixing Details
- Large Sliding Glass Handle and Lock
- Monoblock Frame, 4 mm Tempered Low-e Sliding Glass
- Galvanized Base Sheet
- Inner Body Type 0.45mm Stucco Aluminium sheet
- Outer Body Type White painted on galvanized sheet 0,7 mm
- Aluminum Corner Covers
- Standard Certificates (CE, CB, EMC)
- Scraper
- Water Drain System

OPTIONS (May differ according to models)

- Commercial Wire Basket
- Colored Frame
- White Metal Inner Liner
- LED Illuminated Canopy
- High Wooden Palet (Wheel-mounted)
- Flat Sliding Glass
- Sticker Application (4 Sides)
- Residual Current Relay Plug Group
- Passive RFID
- Ground Mounting Kit
- Digital Thermostat
- Analog Thermometer
- Digital Thermometer

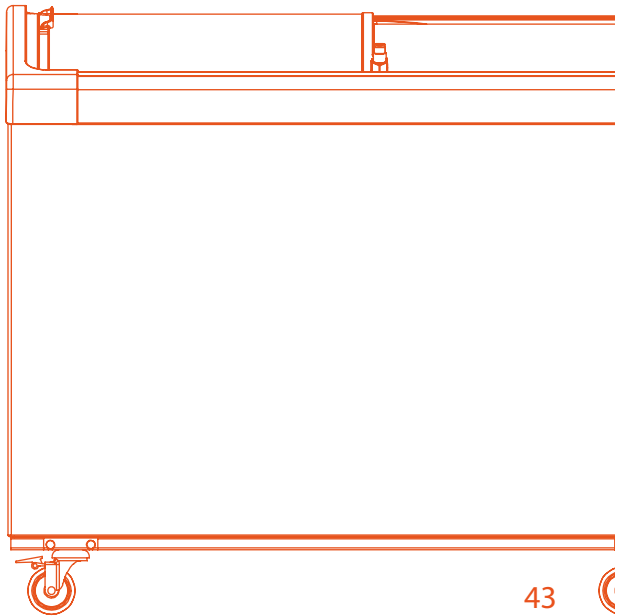



ICY
Ice Cream Showcases



OPTIONS

Ice Cream Boxes (INOX)



While serving your products in a wider area, it allows you to work comfortably and hygienically.

Digital Thermostat



You can completely control the performance of your cooler.

Ice Cream Bowl System Without Basket



It provides ergonomic and hygienic use in ice cream service.

Ice Cream Showcases / Icy



OUS 310 MA DC R



OUS 410 MA DC R



OUS 510 MA DC R

STANDARD TECHNICAL SPECIFICATIONS


Volume, Gross / Net (l)	278 / 210	371 / 283	432 / 330
Dimensions (External with Castors) (W x D x H) (mm)	1036 x 650 x 1287	1311 x 650 x 1315	1487 x 650 x 1315
Dimensions (Internal) (W x D x H) (mm)	1065 x 685 x 850	1345 x 685 x 850	1514 x 685 x 850
Temperature Hold Time (Hours) In 30°C Ambient	13	11	11
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Bowl (max. Pcs)	5	7	8
Cooler Refrigerant Type	R290	R290	R290
Cooler Climate Class	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)
Cooler Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Cooler Noise Level (dBa)	45-47	45-47	45-47
Loading (20' DC Container) (units) (With glass unit)	32	24	22
Loading (40' HC Container) (units) (With glass unit)	87	63	57
Loading (Truck, 13,6 m) (units) (With glass unit)	112	88	78
Weight Net / Gross (kg)	55 / 68	65 / 79	75 / 90

HIGHLIGHTS

- 3000 mm / 3x1 mm² Power Cable Length
- Mechanical Thermostat Type
- Power Cable Winding and Plug Fixing Details
- Large Sliding Glass Handle and Lock
- Monoblock Frame, 4 mm Tempered Low-e Sliding Glass
- Aluminum Corner Covers
- Inner Body Type 0.45 mm Stucco Aluminium sheet
- Outer Body Type White painted on galvanized sheet 0,7 mm
- Galvanizli Taban Sacı
- Inner Body LED Lighting
- Aluminum Top Bench and 6 mm Tempered Rayon Glasses
- Water Drain System

OPTIONS


- White Metal Inner Liner
- Sticker Application (4 Sides)
- Passive RFID
- Ice Cream Boxes (INOX)
- Analog Thermometer
- Digital Thermometer
- Digital Thermostat
- Ice Cream Bowl System Without Basket

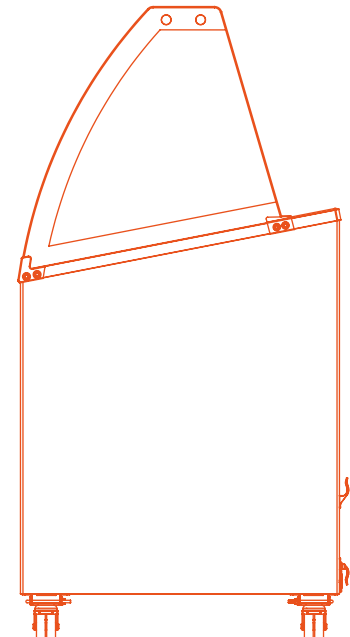



GASTRO

INOX Inner Body Conservators

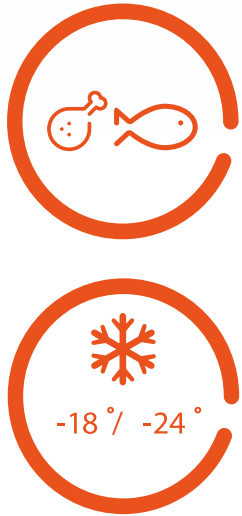

HIGHLIGHTS

430 Quality INOX Inner Body



Chrome inner body provides gastronomic use.

Fast and High Freezing Capacity



You can completely control the performance of your cooler.

With and without Brakes Wheel



Durable and robust wheels, you can easily move your conservator wherever you want and fix it.

INOX Inner Body Conservators / Gastro




OUS 510 PD SL INOX



OUS 610 PD SL INOX


STANDARD TECHNICAL SPECIFICATIONS		
Volume, Gross / Net (l)	469 / 454	573 / 555
Dimensions (External with Castors) (W x D x H) (mm)	1492 x 742 x 920	1775 x 742 x 920
Dimensions (Internal) (W x D x H) (mm)	1365 x 528 x 677/421	1648 x 528 x 677/421
Dimensions (External with Package) (W x D x H) (mm)	1547 x 768 x 878	1826 x 768 x 878
Temperature Hold Time (Hours) In 30°C Ambient	35	38
Inner Body Type	0.4mm INOX sheet (430 Quality)	0.4mm INOX sheet (430 Quality)
Wheel	4 pcs (2 with Brake)	6 pcs (3 with Brake)
Cooler Refrigerant Type	R290	R290
Cooler Climate Class	5 / CC1 (40°C / 40% Rh)	5 / CC1 (40°C / 40% Rh)
Cooler Temperature Range (°C)	-18 / -24	-18 / -24
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	20	18
Loading (40' HC Container) (units)	66	57
Loading (Truck, 13,6 m) (units)	75	66
Weight Net / Gross (kg)	61 / 67	72 / 79

HIGHLIGHTS (May differ by models)	
• 32 kg / m3 Density Polyurethane Door and Body	• Door Lock and Aluminum Handle
• Inner Body LED Bulb Lighting	• Inner Body Type 0.4mm INOX sheet (430 Quality)
• Mechanical Thermostat Type	• Outer Body Type White painted on galvanized sheet 0,7 mm
• Door Sheet White painted on galvanized sheet 0,7 mm	• Packing Type Carton Packing + Wooden Pallet
• 3000mm / 3x1 mm² Power Cable Length	• Scraper
• With and without Brakes Wheel	• Water Drain System
OPTIONS (May differ according to models)	
• Commercial Wire Basket (Maks. 6 / 7)	• INOX Door Sheet
• Passive RFID	• Alternative Handle - RONA - ERGO
• Analog ve Digital Thermometer	• Alternative Handle - EKO - NEWLINE
• Digital Thermostat	

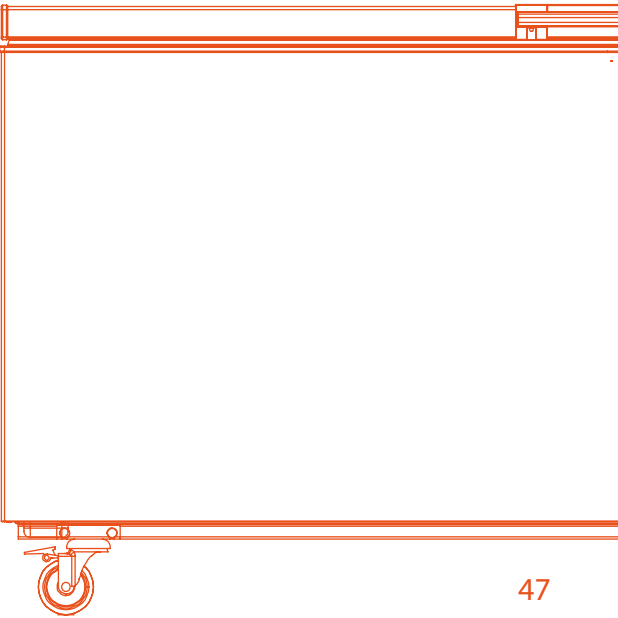



HORECA
Commercial Conservators



HIGHLIGHTS

Safety and Ergonomics Functions



Off Function
Energy Lamp
Fast Freeze Button

3 Mode Usage



Defrosting Mode / Chiller Mode
can be used as a defrost at -1 / +1 °C.

Cooler Mode / Cooler can be used as a
refrigerator at +4 / +6 °C.

Freezer Mode / Freezer can be used as a
deep freezer at -24 / -18 °C.

Hanger



You can hang and freeze your delicate foods.

Commercial Conservators / Horeca



OIF 5500

OIF 6600

OIF 6650

STANDARD TECHNICAL SPECIFICATIONS


R290	C - 5/CC1 / (40°C / 40% Rh)	C - 5/CC1 / (40°C / 40% Rh)	C - 5/CC1 / (40°C / 40% Rh)
Volume, Gross / Net (l)	469 / 459	572 / 561	635 / 621
Dimensions (External) (W x D x H) (mm)	1492 x 743 x 840	1775 x 743 x 840	1904 x 743 x 840
Dimensions (External with Package) (W x D x H) (mm)	1552 x 770 x 883	1835 x 770 x 883	1959 x 770 x 883
Freezer Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24
Chiller Temperature Range (TRIPLE MODE) (°C)	-1 / +1	-1 / +1	-1 / +1
Fridge Temperature Range (DUAL MODE) (°C)	+4 / +6	+4 / +6	+4 / +6
Cooler Refrigerant Type	R290	R290	R290
Freezing Capacity (kg/24H)	18	20	22
Temperature Hold Time (-19/-9) (Hours)	35	35	39
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	20 / 66	18 / 57	16 / 54
Loading (Truck, 13,6 m) (units)	75	66	60
Number of Storage Basket	2	2	2
Weight Net / Gross (kg)	58 / 55	69 / 65	71 / 68

HIGHLIGHTS (May differ by models)

- | | |
|---|--|
| • Triple Mode (Chiller/Cooler/Freezer) | • Inner Body Type 0.40 mm Stucco Aluminium sheet |
| • Inner Light (LED Bulb) | • Outer Body Type White painted on galvanized sheet 0,7 mm |
| • Mechanical Thermostat | • Packing Type Carton Packing + Wooden Pallet |
| • Kapı Sacı Beyaz boyalı 0.45 mm galvaniz sac | • Divider |
| • Door Lock | • Shutdown from Control Panel |
| • High Temperature Alarm | • Water Drain System |

OPTIONS (May differ according to models)

- | | |
|-------------------------------------|--|
| • White Painted Aluminum Inner Body | • Alternative Handle - EKO - NEWLINE - ROBA - ERGO |
| • Digital ve Analog Thermometer | • Passive RFID |
| • Wheel | • Digital Thermostat |
| • Inner Slide Glass | • Inox Door Sheet (430 Quality) |

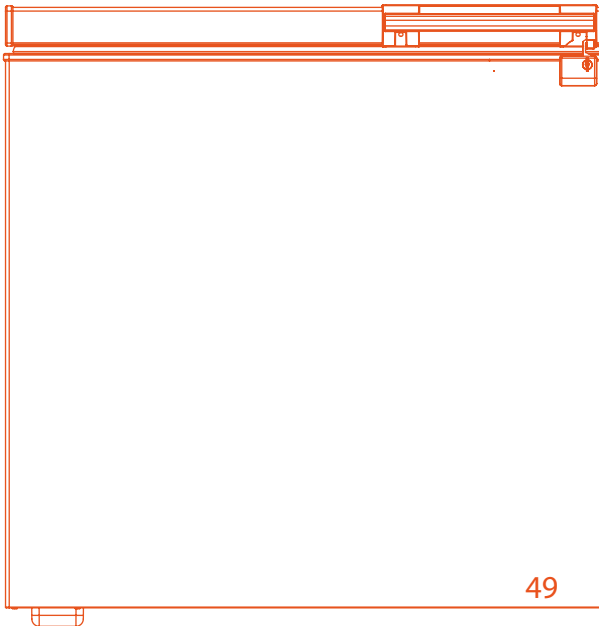



MINUS |
-40°C Conservators



HIGHLIGHTS

90 mm Isolation Thickness



90 mm isolation thickness provides a thicker body and energy efficiency.

Digital Thermostat



You can completely control the performance of your cooler.

With and without Brakes Wheel



Durable and robust wheels, you can easily move your conservator wherever you want and fix it.

-40°C Conservators / Minus



OUS 210 PD SL -40




OUS 310 PD SL -40



OUS 410 PD SL -40

STANDARD TECHNICAL SPECIFICATIONS			
Volume, Gross / Net (l)	138 / 134	220 / 225	301 / 295
Dimensions (External) (W x D x H) (mm)	763 x 745 x 907	1039 x 745 x 907	1314 x 745 x 934
Dimensions (Internal) (W x D x H) (mm)	572 x 460 x 616	848 x 460 x 616	1123 x 460 x 616
Dimensions (External with Package) (W x D x H) (mm)	834 x 786 x 897	1109 x 786 x 897	1383 x 786 x 897
Freezer Temperature Range (°C)	-18 / -40	-18 / -40	-18 / -40
Cooler Refrigerant Type	R290	R290	R290
Freezer Climate Class	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)	7 / BC1 (35°C / 75% Rh)
Freezer Temperature Protection Time (-19/-9) (Hour)	29	39	37
Thermostat Type	Digital	Digital	Digital
Wheel	4 pcs (2 with Brake)	4 pcs (2 with Brake)	4 pcs (2 with Brake)
Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	42	30	24
Loading (40' HC Container) (units)	126	96	75
Loading (Truck, 13,6 m) (units)	153	108	84
Weight, Gross / Net (kg)	38	46,5	52,7

HIGHLIGHTS (May differ by models)	
• 3000 mm / 3x1 mm² Power Cable Length	• Inner Body Type 0.40 mm Stucco Aluminium sheet
• Inner Light (LED Bulb)	• Outer Body Type White painted on galvanized sheet 0,45 mm
• Digital Thermostat	• Door Type White painted on galvanized sheet 0,45 mm
• Wheel	• Scraper
• Door Lock	• Standard Certificates (CE, CB, EMC)
• Water Drain System	• Packing Type Carton Packing + Wooden Pallet
OPTIONS (May differ according to models)	
• White Painted Aluminum Inner Body	• Inox Door Sheet (430 Quality)
• Alternative Handle - EKO - NEWLINE	• Passive RFID
• Alternative Handle - RONA - ERGO	
• Commercial Wire Basket	

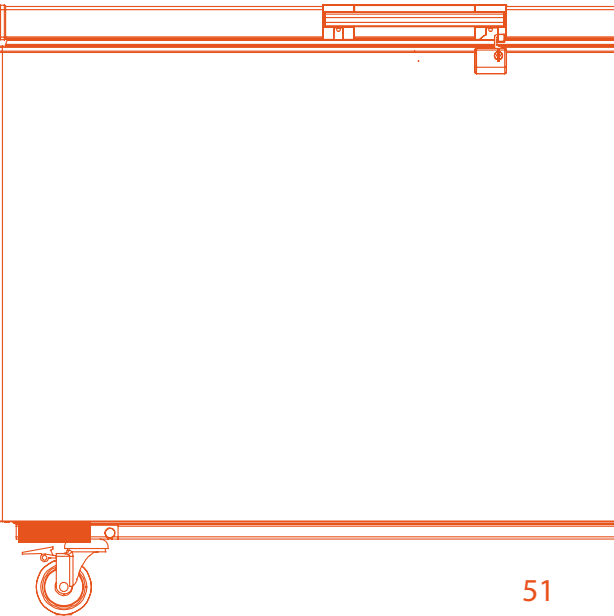



PLATIN |
Chest Freezers



Chest Freezers / Platin



OF 2220 A++ OIF 2200 D



OF 3320 A++ OIF 3300 D

OF 4420 A++ OIF 4400 D

STANDARD TECHNICAL SPECIFICATIONS			
Energy and Climate Class	A++ / D , SN-T	A++ / D , SN-T	A++ / D , SN-T
Volume, Gross / Net (l)	138 / 134	220 / 215	301 / 295
Unpacked Dimension (W x D x H) (mm)	765 x 743 x 840	1041 x 743 x 840	1316 x 743 x 840
Dimensions (External with Package) (W x D x H) (mm)	820 x 770 x 883	1096 x 770 x 883	1370 x 770 x 883
Freezer Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24
Eco Mode Temperature Range (°C)	-18	-18	-18
Freezer Mode Temperature Range (°C)	+4 / +6	+4 / +6	+4 / +6
Freezer Gas Type	R600a	R600a	R600a
Freezing Capacity (kg/24H)	10	12	12
Freezer Temperature Protection Time (-19/-9) (Hour)	48	57	57
Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	42	30	24
Loading (40' HC Container) (units)	126	96	75
Loading (Truck, 13,6 m) (units)	153	108	84
Weight, Gross / Net (kg)	43 / 41	50,5 / 48	58 / 55

HIGHLIGHTS		
• Interior Light (Strip Led ☒)	• Aluminum Handle with Lock	• Water Drain System and Ice Scraper
• Digital Thermostat	• Food Divider	• Plug Fixing Detail
• Wire Basket for Practical Use (1 pcs)	• POM Plastic Foot	• Door Handle Detail
• 4 Mode (Freezer / Eco / Cooler / Super)	• Slot-In Door Gasket	• 90 mm Isolation Thickness
• Safety and Ergonomics Functions	• Inner Body Type 0.40 mm Stucco Aluminium sheet	• Standard Certificates (CE, CB, EMC)
• Shutdown Function from Control Panel	• Body and Door Type White Painted 0,45 mm Galvanized Sheet	• Packing Type Styrofoam + Shrink Packaging

OPTIONS		
• White Aluminum Inner Body	• Alternative Handle - EKO - NEWLINE	• Inner Sliding Glass
• Digital / Analog Thermometer	• Alternative Handle - ROBA - ERGO	• Inox Door Sheet (430 Quality)
• Wheels		



PLATIN |
Chest Freezers



Chest Freezers / Platin



OF 1150 A+

OIF 1150 F

OF 2220 A+

OIF 2220 F

OF 3320 A+

OIF 3320 F

OF 4420 A+

OIF 4420 F


STANDARD TECHNICAL SPECIFICATIONS				
Energy and Climate Class	A+ / F , SN-T	A+ / F , SN-T	A+ / F , SN-T	A+ / F , SN-T
Volume, Gross / Net (l)	122 / 120	202 / 195	305 / 295	407 / 395
Unpacked Dimension (W x D x H) (mm)	575 x 620 x 840	765 x 743 x 840	1041 x 743 x 840	1316 x 743 x 840
Dimensions (External with Package) (W x D x H) (mm)	635 x 640 x 883	820 x 770 x 883	1096 x 770 x 883	1370 x 770 x 883
Freezer Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24	-18 / -24
Defrosting Mode Temperature Range (°C)	-1 / +1	-1 / +1	-1 / +1	-1 / +1
Freezer Mode Temperature Range (°C)	+4 / +6	+4 / +6	+4 / +6	+4 / +6
Freezer Gas Type	R600a	R600a	R600a	R600a
Freezing Capacity (kg/24H)	7	9	13	16
Freezer Temperature Protection Time (-19/-9) (Hour)	29	29	39	37
Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	54	42	30	24
Loading (40' HC Container) (units)	162	126	96	75
Loading (Truck, 13,6 m) (units)	189	153	108	84
Weight, Gross / Net (kg)	34 / 32	39 / 36,5	47 / 44,5	54 / 50,5

HIGHLIGHTS		
• Interior Light (Strip Led 8)	• Aluminum Handle with Lock	• Water Drain System and Ice Scraper
• Mechanical Termostat	• Food Divider	• Plug Fixing Detail
• Wire Basket for Practical Use (1 pcs)	• POM Plastic Foot	• Door Handle Detail
• 3 Mode (Defrosting / Cooler / Freezer)	• Slot-In Door Gasket	• 60 mm Isolation Thickness
• Safety and Ergonomics Functions	• Inner Body Type 0.40 mm Stucco Aluminium sheet	• Standard Certificates (CE, CB, EMC)
• Shutdown Function from Control Panel	• Body and Door Type White Painted 0,45 mm Galvanized Sheet	• Packing Type Styrofoam + Shrink Packaging

OPTIONS		
• White Aluminum Inner Body	• Alternative Handle - EKO - NEWLINE	• Inner Sliding Glass
• Digital / Analog Thermometer	• Alternative Handle - ROBA - ERGO	• Inox Door Sheet (430 Quality)
• Wheels	• Dijital Thermostat	• Quick Freeze Button



PLATIN
Chest Freezers

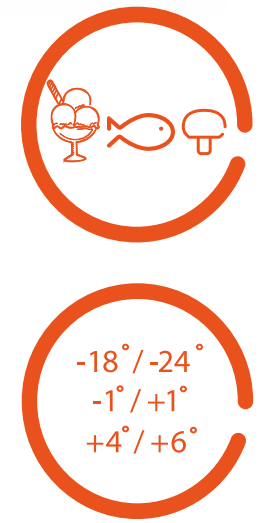

HIGHLIGHTS

Safety and Ergonomics Functions



Off Function
Energy Lamp
Fast Freeze Button

3 Mode Usage



Defrosting Mode / Chiller Mode
can be used as a defrost at -1 / +1 °C.

Cooler Mode / Cooler can be used as a
refrigerator at +4 / +6 °C.

Freezer Mode / Freezer can be used as a
deep freezer at -24 / -18 °C.

Hanger



You can hang and freeze your delicate foods.

Chest Freezers / Platin




OF 5500 A+

OF 6600 A+

OF 6650 A+

STANDARD TECHNICAL SPECIFICATIONS			
Energy and Climate Class	A+ / SN-T	A+ / SN-T	A+ / SN-T
Volume, Gross / Net (l)	469 / 459	572 / 561	635 / 621
Dimensions (External) (W x D x H) (mm)	1492 x 743 x 840	1775 x 743 x 840	1904 x 743 x 840
Dimensions (External with Package) (W x D x H) (mm)	1552 x 770 x 883	1835 x 770 x 883	1959 x 770 x 883
Freezer Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24
Chiller Temperature Range (TRIPLE MODE) (°C)	-1 / +1	-1 / +1	-1 / +1
Fridge Temperature Range (DUAL MODE) (°C)	+4 / +6	+4 / +6	+4 / +6
Cooler Refrigerant Type	R600a	R600a	R600a
Freezing Capacity (kg/24H)	18	20	22
Temperature Hold Time (-19/-9) (Hours)	35	35	39
Cooler Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	20 / 66	18 / 57	16 / 54
Loading (Truck, 13,6 m) (units)	75	66	60
Number of Storage Basket	2	2	2
Weight Net / Gross (kg)	58 / 55	69 / 65	71 / 68

HIGHLIGHTS (May differ by models)	
• Triple Mode (Chiller/Cooler/Freezer)	• Inner Body Type 0.40 mm Stucco Aluminium sheet
• Inner Light (LED Bulb)	• Outer Body Type White painted on galvanized sheet 0,7 mm
• Mechanical Termostat	• Packing Type Carton Packing + Wooden Pallet
• Kapı Sacı Beyaz boyalı 0.45 mm galvaniz sac	• Divider
• Door Lock	• Shutdown from Control Panel
• High Temperature Alarm	• Water Drain System
OPTIONS (May differ according to models)	
• White Painted Aluminum Inner Body	• Alternative Handle - EKO - NEWLINE - ROBA - ERGO
• Digital ve Analog Thermometer	• Passive RFID
• Wheel	• Digital Thermostat
• Inner Slide Glass	• Inox Door Sheet (430 Quality)

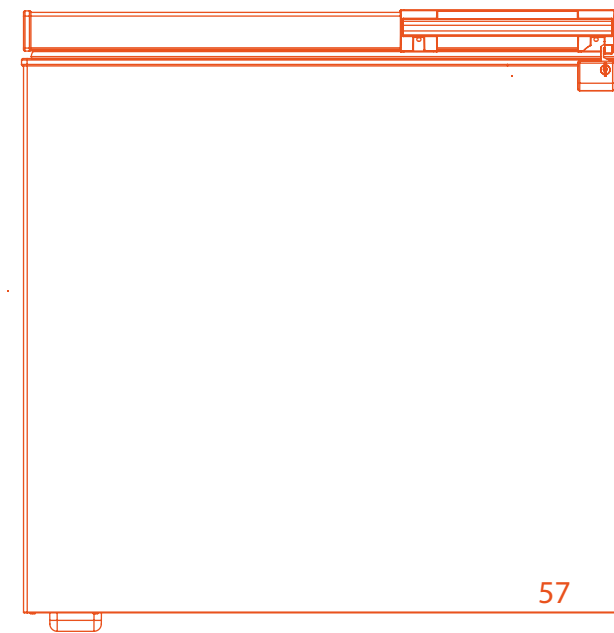



PLATIN
Upright Freezers



Upright Freezers / Platin



OFS 6210 A+ / UF 6210



OFS 7300 A+ / UF 7300

STANDARD TECHNICAL SPECIFICATIONS		
Energy and Climate Class	A+ / F , SN-T	A+ / F , SN-T
Freezer Energy Consumption (kWh / 24h)	0,682	0,807
Volume, Gross / Net (l)	210 / 200	288 / 285
Unpacked Dimension (W x D x H) (mm)	540 x 590 x 1470	595 x 635 x 1760
Dimensions (External with Package) (W x D x H) (mm)	576 x 628 x 1515	642 x 686 x 1832
Freezer Temperature Range (°C)	-18 / -24	-18 / -24
Number of Drawers + Flap	5 + 1	5 + 2
Freezer Gas Type	R600a	R600a
Freezing Capacity (kg/24H)	10	10
Freezer Temperature Protection Time (Hour)	20	23
Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	48	27
Loading (40' HC Container) (units)	128	73
Loading (Truck, 13,6 m) (units)	150	85
Weight, Gross / Net (kg)	53 / 50	69,8 / 65,8

HIGHLIGHTS		
• High insulation thickness, 32 kg / m3 Polyurethane density	• Large Inner Volume	• Static All Around Cooling
• Durable and Transparent Drawers	• Upward Opening Flap Lids	• Aluminum Door Handle (For 7 Drawers)
• Metal Rear Wall and Bottom Side	• Removable Glass Shelves	• 135° Wide Opening Door
• Easily Serviceable Door Gasket	• Adjustable Front Feet and Rear Wheels	• Packing Cartoon Packing + Shrink Packaging
• Easy to Clean Door and Body	• Inner Body Type White HIPS Plastic	• Standard Certificates (CE, CB, EMC)
• Reversible Door Direction	• Outer Body Type White painted on galvanized sheet 0,45 mm	

OPTIONS	
• INOX Edition (INX), Silver Edition (S) ve Black Edition	• Lean Product
• Easy Open Handle (EOH)	• Hotstamp Drawer Covers
• Different Plug Models	• Ice Mould, Ice Tray, Ice Box and Accessories



PLATIN

Upright Freezers



Upright Freezers / Platin



OFS 7301 NF A+ / UF 7301 NF



OFS 7401 NF A+ / UF 7401 NF



OFS 8401 NF A+ / UF 8401 NF

STANDARD TECHNICAL SPECIFICATIONS			
Energy and Climate Class	A+ / F , SN-T	A+ / F , SN-T	A+ / F , SN-T
Freezer Energy Consumption (kWh / 24h)	0,918	0,862	0,862
Volume, Gross / Net (l)	300 / 290	308 / 276	308 / 276
Unpacked Dimension (W x D x H) (mm)	595 x 710 x 1760	595 x 720 x 1850	595 x 720 x 1850
Dimensions (External with Package) (W x D x H) (mm)	642 x 792 x 1833	642 x 772 x 1920	642 x 772 x 1920
Freezer Temperature Range (°C)	-18 / -24	-18 / -24	-18 / -24
Number of Drawers + Flap	5 + 2	5 + 2	6+ 2
Freezer Gas Type	R600a	R600a	R600a
Freezing Capacity (kg/24H)	16	20	20
Freezer Temperature Protection Time (Hour)	18	20	20
Voltage / Frequency (V / Hz)	220 ~ 240 / 50	220 ~ 240 / 50	220 ~ 240 / 50
Loading (20' DC Container) (units)	25	27	27
Loading (40' HC Container) (units)	66	72	72
Loading (Truck, 13,6 m) (units)	84	84	84
Weight, Gross / Net (kg)	77,8 / 73	78,2 / 71,2	80 / 73

HIGHLIGHTS		
• High insulation thickness, 32 kg / m3 Polyurethane density	• Large Inner Volume	• Dual Function / Dual Mode (For ENF - ENFK models)
• No-Frost Cooling	• Upward Opening Flap Lids	• Aluminum Door Handle
• Metal Rear Wall and Bottom Side	• Removable Glass Shelves	• Durable and Transparent Drawers
• Easily Serviceable Door Gasket	• Adjustable Front Feet and Rear Wheels	• 135° Wide Opening Door
• Easy to Clean Door and Body	• Inner Body Type White HIPS Plastic	• Packing Cartoon Packing + Shrink Packaging
• Reversible Door Direction	• Outer Body Type White painted on galvanized sheet 0,45 mm	• Standard Certificates (CE, CB, EMC)

OPTIONS		
• LED Lighting	• Dual Function	• INOX Edition (INX), Silver Edition (S) ve Black Edition
• Easy Open Handle (EOH)	• Lean Product	• Electronic Control (ENF) On Door Electronic Control (ENFK)
• Different Plug Models	• Hotstamp Drawer Covers	• Ice Mould, Ice Tray, Ice Box and Accessories



OUR DESIGN